

Front

Specifications

Dimensions


Quick Setup Guide

Door Sensor





Overview

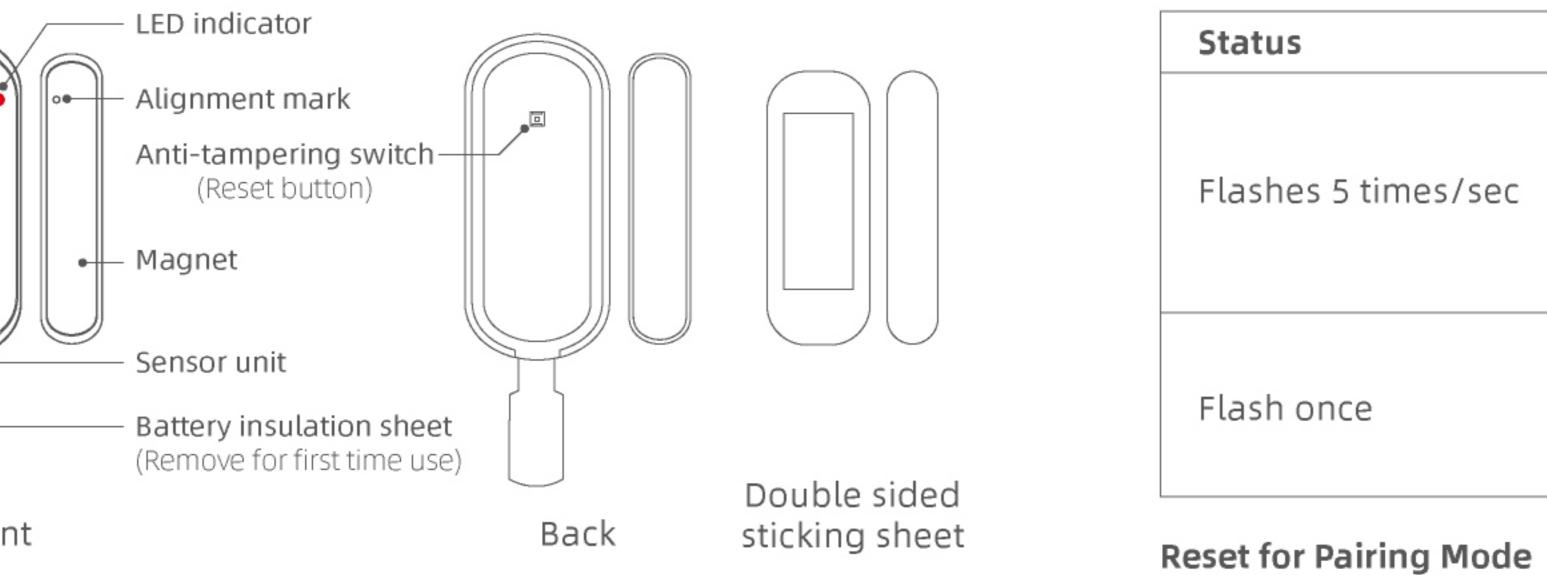

battery consumption

Connectivity: 2.4GHz wireless **DO NOT** power off hub Battery: CR2450 Est. battery life: 1 year

during use of sensors -It may cause higher Working environment: -10°C~55°C, ≤90%RH

Sensor unit: 72.8x32.3x12.8mm (2.86x1.27x0.50 in.) Magnet: 64.8x13.7x9.3mm (2.55x0.54x0.37 in.)

Indications

with BroadLink APP. battery insulation sheet is pulled out). A 2.4GHz Wi-Fi network with

Internet connection. In case it is not in pairing mode, quickly press the anti-tampering switch

	Indication	Internet	
ec	The device is in pairing mode The pairing mode will last only for 15s for power saving. Please finish pairing in 15s, otherwise a manual reset is	Wi-Fi Router	
	required.	Phone •••	
	Door/window is opened/closed, or Anti-tampering switch is triggered (sensor might be removed)	S3 Hub	
		Door	

iOS 9.0 / Android™ 4.1 or higher The device will be in pairing mode by default in first time use (when the

sensor

A smartphone or tablet running

hub to be installed and kept

online during setup and use).

 S3 hub already configured in for 5 times in 2 seconds until the LED indicator flashes 5 times/sec APP (Door sensor requires the

STEP 1 What's required

a) Label on package

b) Printed inside on back cover

When you input SN manually,

remember to input all characters

(SN://XXXXXXXXXXXXX) including


Please select a hub Smart hub

- Open BroadLink APP, tap "+" After scanning, confirm the button and then "Scan QR code". product information with the
- Scan the QR code or input SN from: picture and name shown in the Choose a hub for the sensor.

the sensor (if needed).


- The sensor will be added to th hub as a sub-device and tap "I know it" to proceed.

STEP 4 Pair Sensor

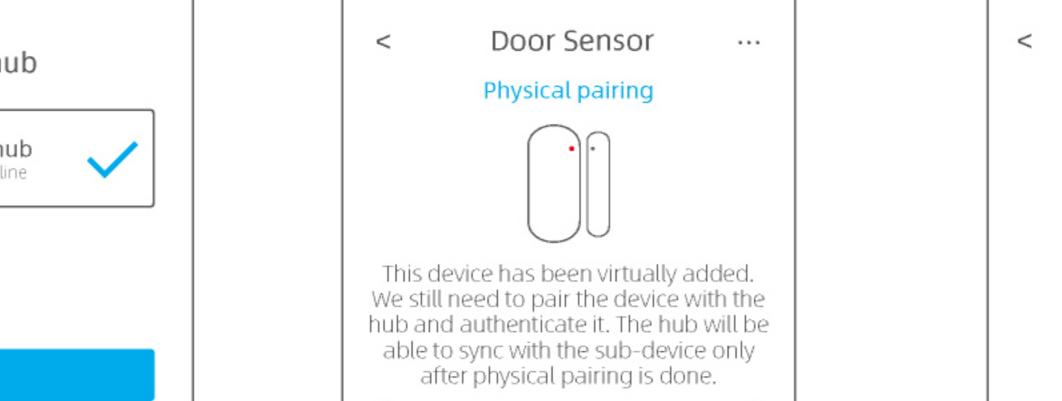


- Tap "Use device now" and the APP will prompt you to continue with physical pairing.
- The device page also shows the Make sure the sensor is in pairing mode (LED indicator flashes quickly).
- Tap "The device is in pairing mode"

STEP 5 View St

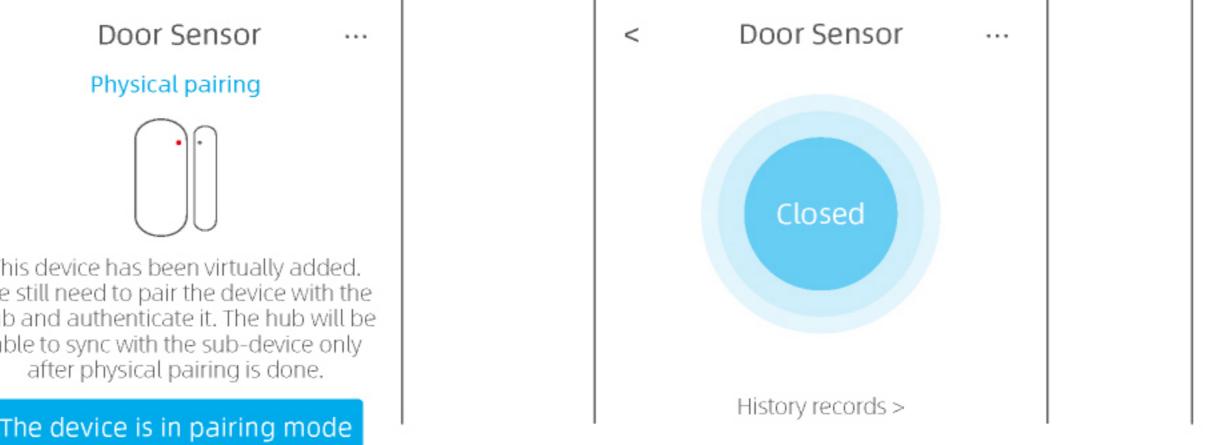

- You can view the "opened/ closed" status in device list or
- device page. state change history.
- You can tap "History records" to to proceed and complete pairing. view all history records.

The pairing mode will only last for 15s.

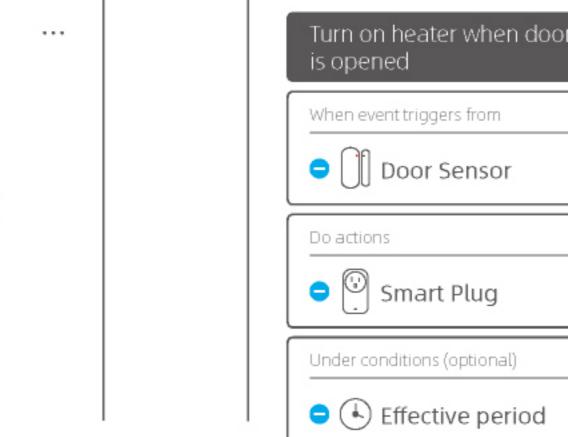


- You can change the background Make sure you have controllable devices (ex. smart plug). picture and give a name for the Tap "Routines" tab at bottom in routine, then save it to enable the
- APP's home page and tap "+" to add a routine.

routine.

 You can tap the toggle in routine Tap "+" buttons to add triggers, list to disable/enable it.

routine.

 If your country has daylight saving opening the APP. actions and conditions (support time (DST), you can tap the " 🗬 ' multiple for each) to create your to enable the DST setting.

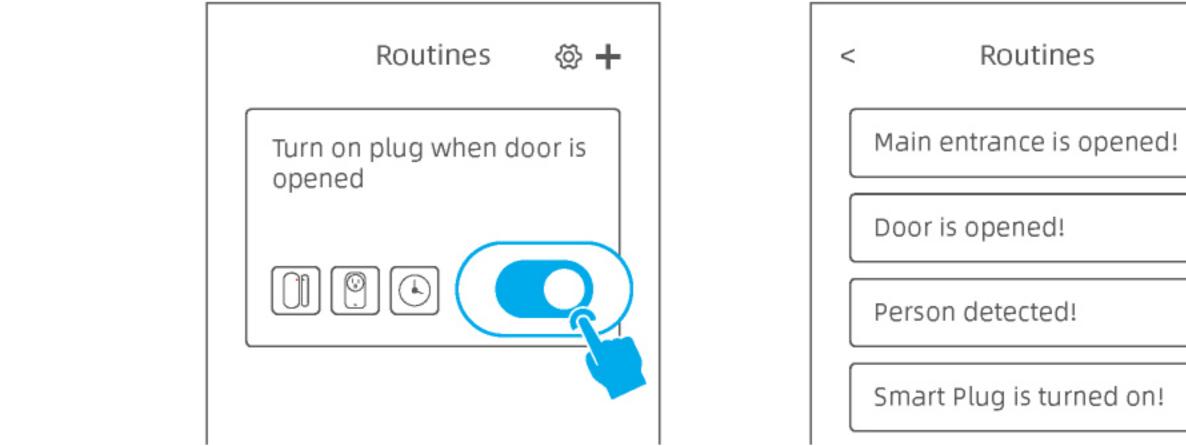

 The notifications will be also Tap "···" at top right and enter "Notification setting". Customize the text of notification management and editing.


is triggered, you will receive a

notification on phone without

- for certain status. When the event Go to "Me" > "Notification Center" to view notification history
 - If you add "Push notification on phone" as an action in routine, you will also be notified when the routine is executed and check the

history in "Notification Center".

Change Battery

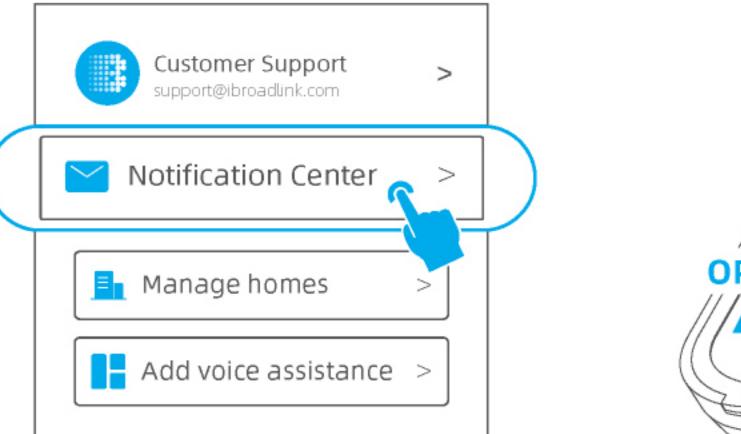

- Open the back cover from displayed in routine list for easier bottom of sensor unit to take out battery and change new one.
 - Battery must be changed asap if "Low battery alert" shows on phone, otherwise the device may stop working unexpectedly.



