

Universal Remote

RM mini 3



Q | BroadLink International



For more promotions and supports

web: www.ibroadlink.com
e-mail: support@ibroadlink.com



Package Content

After opening package, please check contents as below

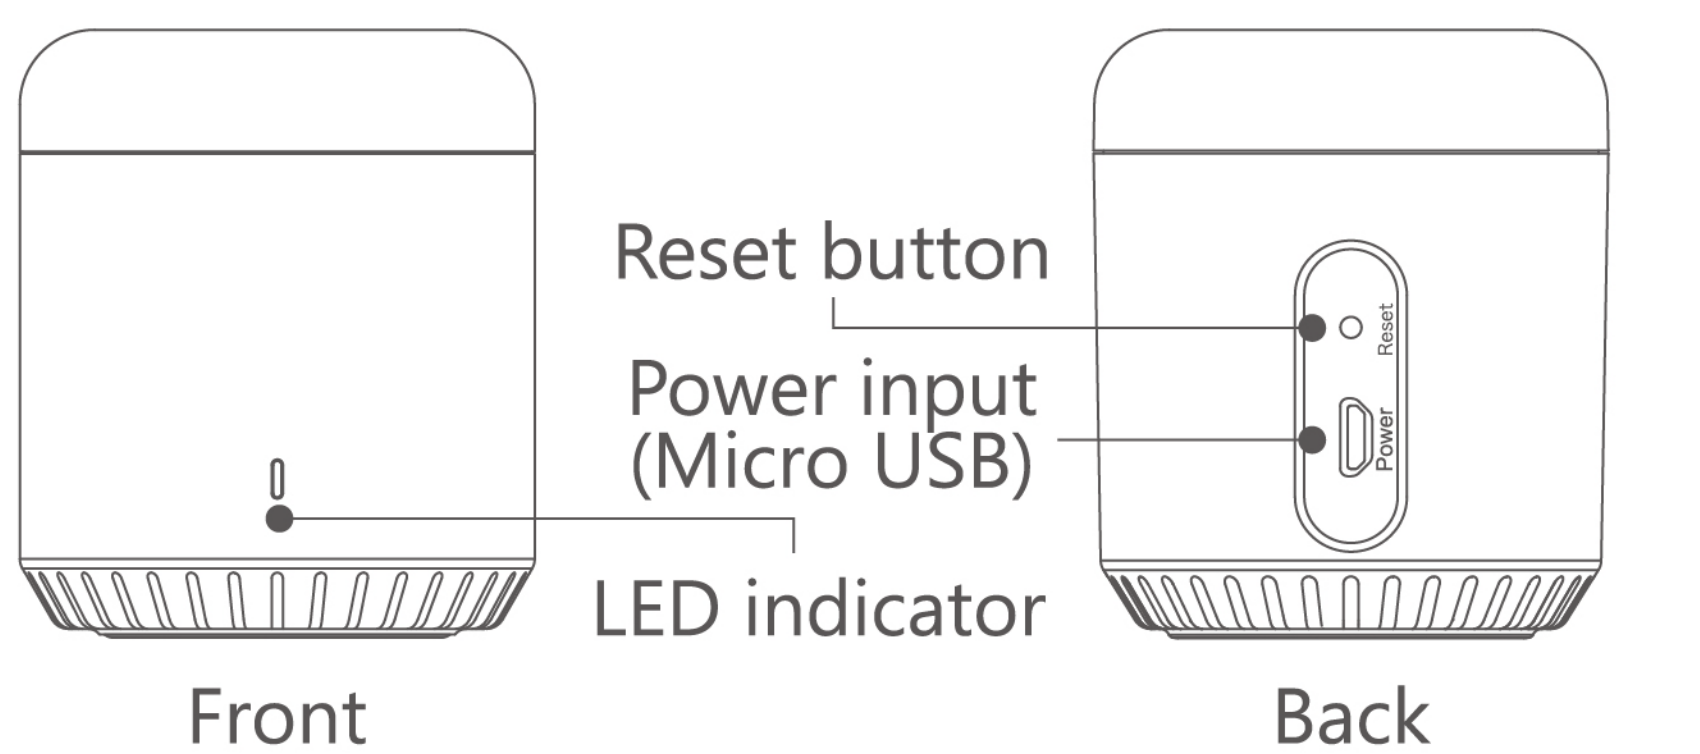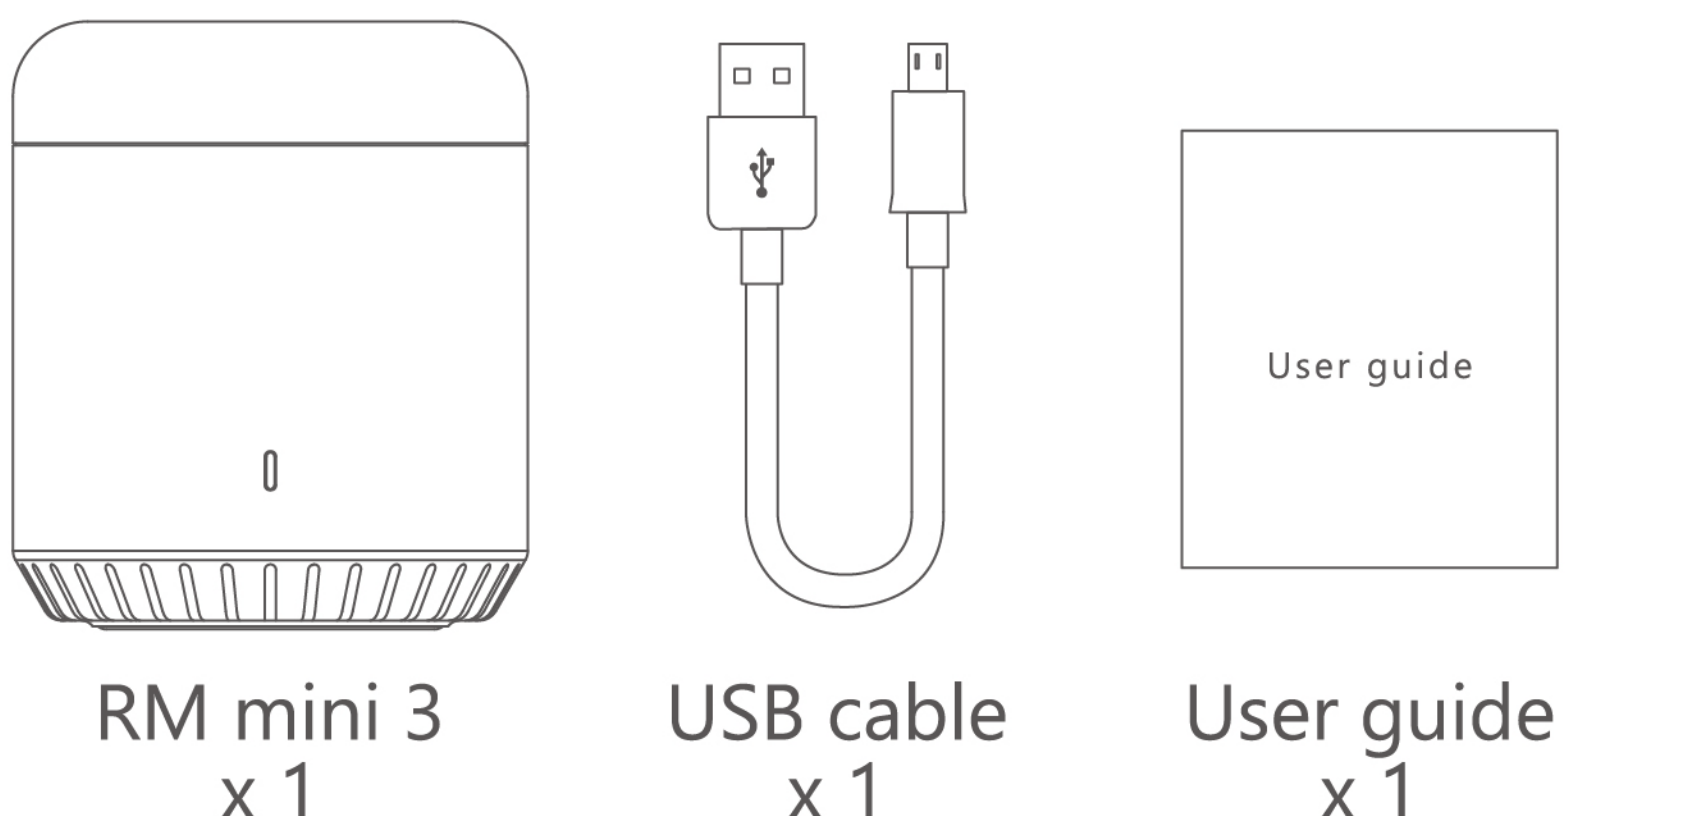

Indications

LED	Status	Indication
1 Blue Wi-Fi LED	Flashes quickly (about 2-3 times per second)	In configuration mode (device waiting to be added)
	Flashes from quickly to slowly then off (during configuration)	Added to Wi-Fi network
	Flashes slowly (once per second)	No network connection. Please check the network and re-configure the device
2 White Operation LED	On (during learning button)	Waiting for button learning, please point the physical remote to it and press the physical button to learn
	Off (during learning button)	The button is successfully learnt
	Flash once	Controlling the IR appliance
Button		Description
3 Reset Button	Press and hold Reset Button with a slim needle for not less than 6s until the Blue Wi-Fi LED flashes quickly (about 2-3 times per second)	

Step 1 Prepare App




Download "BroadLink" App from the App store or Google Play by searching "BroadLink" and connect mobil device to your 2.4GHz Wi-Fi network.

NOTE:

- ① The device only supports Wi-Fi network of 2.4GHz.
- ② The length of password should be no more than 32 characters.
- ③ Support iOS 9.0/ Android 4.0 and above.

Step 2 Prepare Device

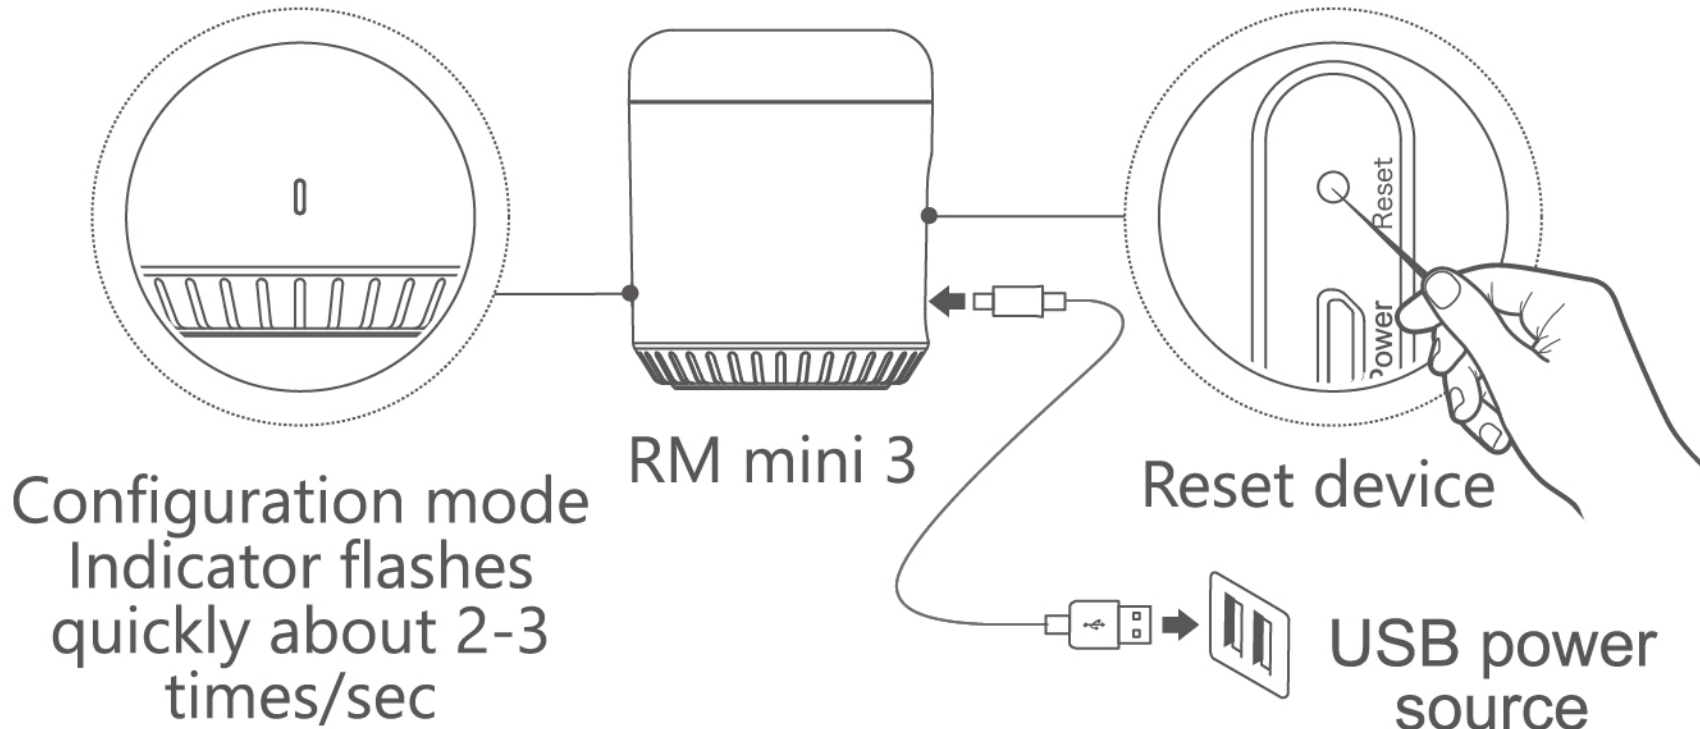

Power on the device with USB cable. If it is in first time use, the blue Wi-Fi LED will flash quickly (about 2-3 times per second) indicating the device is in configuration mode (waiting to be added into network).

NOTE:

If the device is not in first time use, it may not work in configuration mode automatically. In this case, please reset it by pressing and holding Reset Button with a slim needle for not less than 6s until the the blue Wi-Fi LED flashes quickly.

Step 3 Add Device and Voice Control

- When the device is in configuration mode, follow the wizard in App to add device, name it and assign it to a room.
- In device page, choose a type of appliance and follow the wizard to add the virtual remote for it.
- Please make sure all buttons on virtual remote are functioning correctly and the appliance can be remotely controlled through external networks.
- In Alexa & Google & IFTTT App, enable the skill or service named "BroadLink" and discover devices.

NOTE:

You need to discover devices again in Alexa App or unlink and link your account in Google App if the device has been reset.

- The supported regions, languages and voice control commands are subject to changes due to the upgrading on skills and policies of Amazon/Google/IFTTT.
- You can find available voice control commands in control page for supported devices in the App.

FAQs

- ❓ Will others find my devices? How to guarantee the network is safe.
- 💬 Only the one knows the password of your home Wi-Fi and enter into the same network, he/she can find the devices.

A Reset Can Resolve Most Issues

Reset your Universal Remote by pressing and holding the reset button through a slim needle for not less than 6s until the blue LED flashes quickly, then repeat configuration.

FAQs

- ❓ Why the device in the living room can not control the AC in the bedroom?
- 💬 Because IR can't go through walls.
- ❓ What should I do when I fail to configure the device?
- 💬 ① Check if the network is 2.4GHz. The device only supports 2.4GHz Wi-Fi networks. The length of password should be no more than 32 characters.
- ③ Check if the Wi-Fi network is stable without too many connections.
- ❓ How to make the device back to configuration mode?
- 💬 Press and holding Reset Button with a slim needle for not less than 6s until the Blue Wi-Fi LED flashes quickly (2-3 times/second).